


Galvanised Pipe

Antec supply Galvanised Pipe in a variety of sizes and lengths including full length (6.5m) and half length (3.25m).

Galvanised Pipe is available with plain, threaded and roll grooved ends (on request) and are hot dipped galvanized to meet AS 4792.

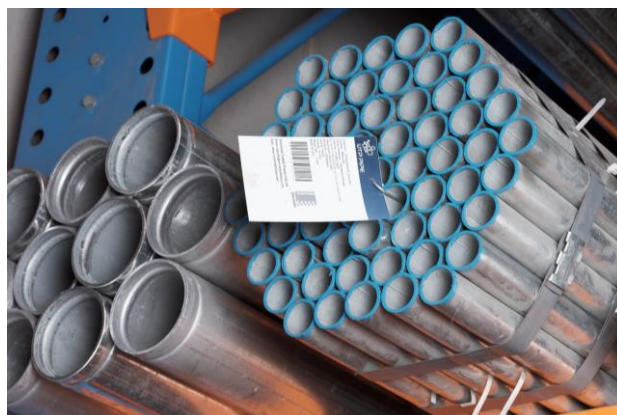

Standards and Specifications

- AS 1074 – Steel Tubes & Tubulars for Ordinary Service
- AS 2419 – Fire Hydrant Installations
- AS 4118 – Fire Sprinkler Systems
- AS/NZ 4792 – Hot-Dip Galvanised (Zinc) Coatings on Ferrous Hollow Sections, Applied by a Continuous or a Specialised Process
- AS 1650-1989 – Hot-Dipped Galvanised Coatings on Ferrous Articles
- AS 1163-1991 – Structural Steel Hollow Sections

Mechanical Properties

- Minimum Yield Strength: 250 mPa
- Minimum Tensile Strength: 320 mPa
- Minimum Elongation: 5.65 vS° 22%

Dimensions			
Size DN	Outside Diameter (mm)	Wall thickness (mm)	Lengths per Sling
15	21.3	2.6	127
20	26.9	2.6	127
25	33.7	3.2	91
32	42.4	3.2	61
40	48.3	3.2	61
50	60.3	3.6	37
65	76.1	3.6	37
80	88.9	4.0	19

Specifications are subject to change without notification.