

Cast Iron Y Strainer

Key features include:

| | |
|-----------------|-------------------------------|
| Body: | Cast Iron to ASTM A126B |
| Cover: | Cast Iron to ASTM A126B |
| Screen: | 316 Stainless Steel |
| Plug: | 304 Stainless Steel |
| Nut | 304 Stainless Steel |
| Stud | 304 Stainless Steel |
| Gasket: | Non-asbestos compressed Fibre |
| Flanges: | Drilled AS2129 Table 'E' |


Pressure & Temperature Rating:

Steam 861 kPa @232°C Water,
oil, gas 1600 kPa @66°C



| Size* | L | H | H1 | L1 | t | n x h | a * | App. Wt (kg) |
|-------|-----|-----|------|-----|----|---------|-----|--------------|
| 50 | 230 | 160 | 250 | 45 | 19 | 4 x 17 | 1.5 | 10 |
| 65 | 290 | 180 | 285 | 25 | 19 | 4 x 17 | 1.5 | 16.00 |
| 80 | 310 | 215 | 330 | 40 | 19 | 4 x 17 | 1.5 | 20 |
| 100 | 350 | 235 | 365 | 55 | 22 | 8 x 17 | 1.5 | 36 |
| 125 | 400 | 275 | 425 | 65 | 22 | 8 x 17 | 1.5 | 50 |
| 150 | 480 | 305 | 480 | 50 | 22 | 8 x 22 | 1.5 | 67 |
| 200 | 600 | 390 | 610 | 80 | 25 | 8 x 22 | 2.5 | 106 |
| 250 | 730 | 540 | 915 | 230 | 25 | 12 x 22 | 2.5 | 188 |
| 300 | 850 | 680 | 1110 | 350 | 29 | 12 x 22 | 2.5 | 330 |

* Other sizes available on request n: # bolt holes per flange a: Mesh hole diameter

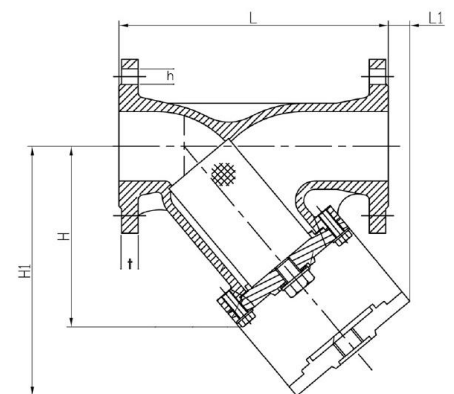

Specifications are subject to change without notification.

