

Basic Universal LED Exit Light

TRADELIKE




FEATURES

- Low power consumption
- 50,000hr LED - energy efficient
- Long life Quick fit bracket for fast ceiling and wall mount
- Easy testing and maintenance

Maintained and non-maintained (Switchable)

- 2 hour runtime in emergency mode
- 2 year warranty
- 1500mAh lithium battery technology
- Designed and manufactured to AS/NZS2293.3

DIMENSIONS

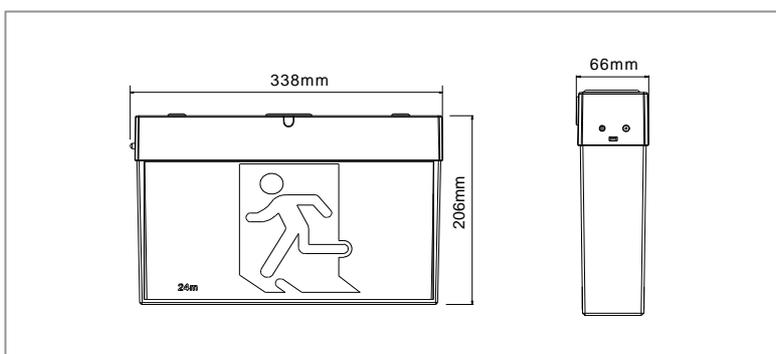

SPECIFICATIONS

Antec Order Code	EL-UNI-LED-BAS
Input Voltage	240v
Construction	Polycarbonate
Mounting	Ceiling and wall
Operating Mode	Maintained and non-maintained
Testing System	Manual
Battery	Lithium1500mAh 2 hour discharge
Classification	C0: D12.5 C90: D8
Viewing Distance	24m
Applicable Standard	AS/NZS2293.3
Lamps	LED 50,000hrs
Operating Temp	1°C to 40°C
Dimensions (mm)	338x206x66
Weight	0.93kg